


機械構造用炭素鋼 (S50C)

在庫品● 取次ぎ品○

ミガキ (S45C) 平鋼は他のページに記載されています。

参照 → P.14~P.16

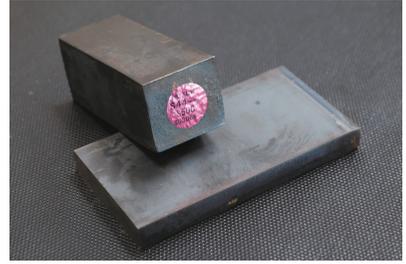

(平) 定尺長さ5.5m or 6m

| 巾 厚さ | 19 | 25 | 32 | 38 | 50 | 65 | 75 | 90 | 105 | 130 | 155 | 185 | 210 | 260 | 310 | 360 | 410 | 460 | 510 | 560 | |
|---------|----|----|----|----|----|----|----|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|---|
| 3 | | | | | | | | | | | | | | | | | | | | | |
| 6 | ● | ● | ● | ● | ● | ● | ● | | 100 | | | | | | | | | | | | |
| 9.5 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | | | | | | | | | |
| 12.7 | | ● | ● | ● | ● | ● | ● | ● | | | | | | | | | | | | | |
| 13 | | | | | | | | | ● | ● | ● | ● | ● | ● | ● | ○ | ○ | | | | |
| 16 | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ○ | ○ | | | | |
| 19 | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ○ | ○ | ○ | ○ | | |
| 22 | | | | | | | | | ● | ● | ● | ● | ● | ● | ● | ○ | ○ | | | | |
| 25 | | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ○ | ○ | ○ | ○ | | |
| 27 | | | | | | | | | ○ | ○ | ● | ● | ● | ● | ● | ○ | | | | | |
| 28 | | | | | | | | | ○ | ○ | | | | | | | | ○ | ○ | ○ | ○ |
| 32 | | | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ○ | ○ | ○ | ○ | ○ | ○ |
| 33 | | | | | | | | | | | | | | | | | | | | | |
| 38 | | | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ○ | ○ | ○ | ○ | ○ | ○ |
| 45 | | | | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ○ | ○ | ○ | ○ | ○ | ○ |
| 50 | | | | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ○ | ○ | ○ | ○ | ○ | ○ |
| 55 | | | | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ○ | ○ | ○ | ○ | ○ | ○ |
| 65 | | | | | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ○ | ○ | ○ | ○ | ○ | ○ |
| 75 | | | | | | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ○ | ○ | ○ | ○ | ○ | ○ |
| 85 | | | | | | | | ● | ● | ● | ● | ● | ● | ● | ● | ○ | ○ | ○ | ○ | ○ | ○ |
| 95 | | | | | | | | | ● | ● | ● | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| 105 | | | | | | | | | | ● | ● | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| 115 | | | | | | | | | | | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| 125 | | | | | | | | | | | | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| 135 | | | | | | | | | | | | | | | | ○ | ○ | ○ | ○ | ○ | ○ |
| 145 | | | | | | | | | | | | | | | | ○ | ○ | ○ | ○ | ○ | ○ |
| 155 | | | | | | | | | | | | | | | | ○ | ○ | ○ | ○ | ○ | ○ |
| 165 | | | | | | | | | | | | | | | | | | | | | |
| 175 | | | | | | | | | | | | | | | | | | | | | |
| 185 | | | | | | | | | | | | | | | | | | | | | |
| 205 | | | | | | | | | | | | | | | | | | | | | |

厚さ25は610巾、660巾及び厚さ38~205は610巾、660巾、710巾、760巾、810巾もあります。(取次ぎ品になります)

(角) ミガキ (S45C) 角鋼は他のページに記載されています。参照 → P.14

| 厚さ | 9.5 | 12.7 | 16 | 19 | 22 | 25 | 28 | 32 | 38 | 44 | 50 | 55 | 65 | 75 | 90 | 100 | 110 | 120 | 130 | 155 | 160 | |
|----|-----|------|----|----|----|----|----|----|----|----|----|----|----|----|----|-----|-----|-----|-----|-----|-----|---|
| × | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ○ | ○ | ○ | ○ | ○ | ○ |

鉄鋼

ステンレス・チタン

アルミ

伸銅

樹脂

参考資料